

Alber™ UXTM - Telecom Monitor

Universal Xplorer Battery Monitor



Benefits

- Automate the IEEE Recommended Practices for Battery Maintenance and Testing
- Monitor up to four strings in parallel
- Robust design will monitor any 24V to 48V battery configuration
- Stay connected with Web enabled technology
- Multiple remote communications and alarm options

A real time battery monitor designed for use in telecommunications or in DC powered data centers.

Monitor Critical Parameters Real Time

- Overall string voltage
- Individual cell/block voltages
- Individual cell/block temperatures
- Ambient temperature
- Discharge, float and ripple current
- Records and stores discharge events






Proactive Battery State of Health Testing

- Tests the entire battery system's integrity
- Internal cell/block resistance test
- Intercell and Intertier connection resistance test

Stand Alone System

- Easily integrates to building management systems
- Embedded Web server with priority email scheduler
- 24x7 data collection, analysis, and remote alarm notification

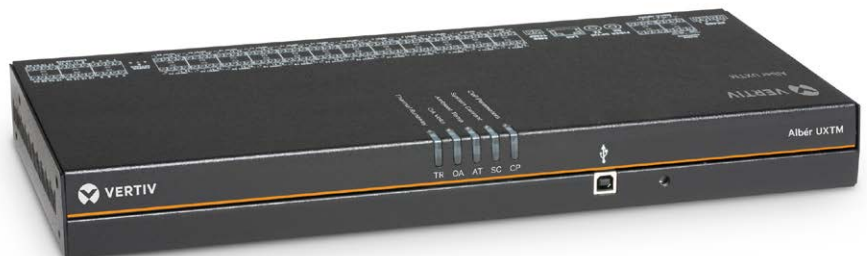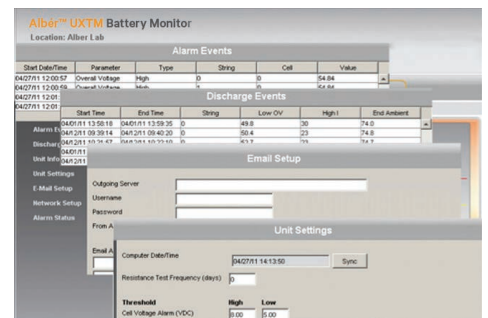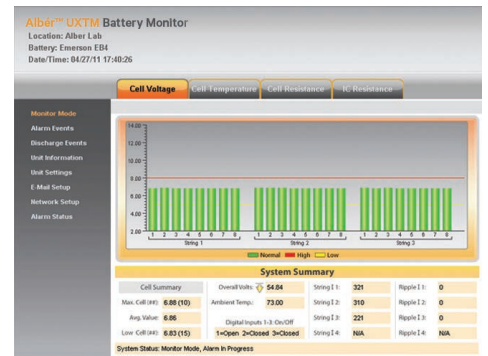

System specifications

Agency Approvals

- UL60950-1, IEC60950-1, EN60950-1
- EN 300386, 2001 Class B
- FCC Part 15, Class B

Operating Environment

- Temperature range: 0°C to 50°C (32°F to 122°F)
- Humidity range: 5% to 95% RH (non-condensing) at 0°C to 32°C

Digital Inputs

- 3 inputs configurable for dry or wet detection

Alarms

- Form C relay contact, 2A at 30VDC

Input Power

- DC Powered - 18 to 58VDC, 7.5W max.

Communications

- RS485 - YDN-23 or MODBUS
- Ethernet - TCP/IP MODBUS or SNMP
- USB

Packaging

- 15.75"W x 1.75"H x 7.00"D
- Wall or 19" Rack Mount

Vertiv.com | Vertiv Headquarters, 1050 Dearborn Drive, Columbus, OH, 43085, USA

© 2020 Vertiv Group Corp. All rights reserved. Vertiv™ and the Vertiv logo are trademarks or registered trademarks of Vertiv Group Corp. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness here, Vertiv Group Corp. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications, rebates and other promotional offers are subject to change at Vertiv's sole discretion upon notice.

System Measurements


Parameter	Tolerance	Number of Inputs
String Voltage	0 to 56 volts	Calculated
Discharge Current	±4000ADC ±1% of full scale with 100μΩ or greater intercell	Calculated
Ripple Current	0 to 250A RMS, ±5% of full scale	Calculated
Float Current	0 to 5000mADC, ±1% of full scale, ±50mA	Calculated
Ambient Temperature	0°C to 80°C ±0.1°C (32°F to 176°F)	1

Cell/Block Level Measurements

Parameter	Tolerance
Cell Voltage	1V range 0 to 4V 0.1% ±1mV
	2V range 0 to 4V 0.1% ±2mV
	4V range 0 to 6V 0.1% ±4mV
	6V range 0 to 9V 0.1% ±6mV
	8V range 0 to 12V 0.1% ±8mV
	12V range 0 to 18V 0.1% ±12mV
16V range 0 to 24V 0.1% ±16mV	
Internal Cell Resistance	0 to 32,000μΩ, 5% of reading ±2μΩ
Intertier Resistance	0 to 5,000μΩ, 5% of reading ±5μΩ
Cell/Block Temperature	0°C to 80°C ±0.1°C (32°F to 176°F)

Specifications subject to change without notice.

Back Panel Connection Details

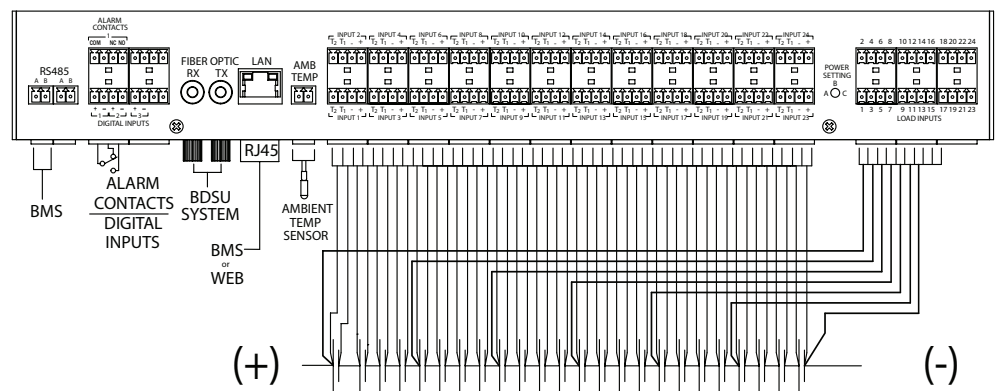

Vertiv.com | Vertiv Headquarters, 1050 Dearborn Drive, Columbus, OH, 43085, USA

© 2020 Vertiv Group Corp. All rights reserved. Vertiv™ and the Vertiv logo are trademarks or registered trademarks of Vertiv Group Corp. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness here, Vertiv Group Corp. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications, rebates and other promotional offers are subject to change at Vertiv's sole discretion upon notice.